




GH-1440B with Taper Attachment

Product Images



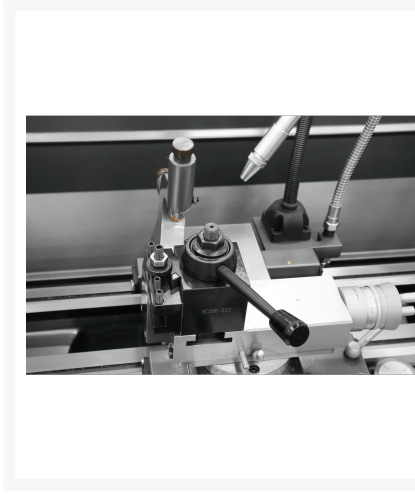

Description

This new JET GH-1440B Geared Head Bench Lathe is engineered for smooth, quiet operation and user versatility. Positioned on a heavy-duty cast iron stand with a newly added built-in footbrake, the GH-1440B includes precision induction hardened ground bed-ways, spindle roller bearings, and high-quality steel hardened gears in the headstock for ultimate working durability. The GH1440B also includes a patented electronic chuck key docking station that prevents startup without the chuck key when safely docked.

Additional Information

Stock Number	JT9-323442
Carriage Travel (In.)	37-2/5
Compound Slide Travel (In.)	3-1/2
Cross Slide Travel (In.)	7
Length of Gap (In.)	8
Max Tool Size (In.)	4/5 x 4/5
Motor (HP)	2 HP, 230V, Single Phase
Number of Inch Threads	34.0000
Number of Longitudinal and Cross Feed Rates	32/32
Number of Metric Threads	26.0000
Number of Spindle Speeds	8
Overall Dimensions (L x W x H) (In.)	76-13/32 x 29-29/32 x 59-13/16
Prop 65	Cancer and Reproductive Harm
Range of Cross Feeds (IPR)	0.007 -0.0187
Range of Inch Threads (TPI)	4-56
Range of Longitudinal Feeds (IPR)	0.002 -0.0548
Range of Metric Threads	0.4-7
Range of Spindle Speeds (RPM)	70-1900
Spindle Bore (In.)	2
Spindle Mount	D1-5
Spindle Taper with Sleeve	MT6
Steady Rest Capacity (In.)	0.31-2.95
Swing Over Bed (In.)	14
Swing Over Cross Slide (In.)	8

Swing Through Gap (In.)	20
Tailstock Spindle Travel (In.)	4
Taper in Tailstock Spindle	MT4
Weight (Lbs.)	1753
Width of Bed (In.)	7.32