




# JTM-1050VS2 Mill With X-Axis Powerfeed

## Product Images

---

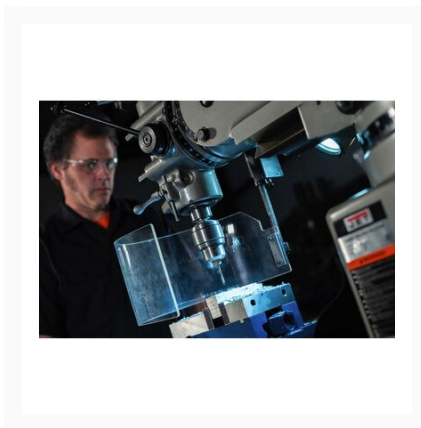



## Description

---

The JET JTM-1050VS2 features Certified Meehanite® castings, a heavy-duty hardened and ground 10" x 50" table, and high precision class 7 precision bearings support the spindle. Precision bored and honed milling heads ensure quality cuts, and the three-stage power downfeed with automatic stop makes the JET Variable Speed Milling Machines easy to use. JET precision engineering ensures superior results with all the features you've come to expect, all backed by the industry-leading JET Two Year Warranty.

## Additional Information

Stock Number	JT9-690120
Collet Capacity	1/8 - 7/8
Distance Spindle to Column (Max.) (In.)	26
Max Distance Spindle to Table (In.)	19
Motor (HP)	3 HP, 230/460V, 3Ph
Overall Dimensions (L x W x H) (In.)	96 x 78 x 88
Powerfeed	X-Axis
Prop 65	Cancer and Reproductive Harm
Quill Diameter (In.)	3-3/8
Quill Down Feed Rates (IPR)	.0015 - .003 - .006
Range of Spindle Speeds (RPM)	70 - 3,800
Spindle Taper (In. x TPI)	R-8
Spindle Travel (In.)	5
Style (Type)	Variable Speed R8
T-Slot Centers (In.)	2-1/2
Table Cross Travel (In.)	15-1/4
Table Longitudinal Travel (In.)	35
Table Longitudinal Travel With Powerfeed (In.)	29-3/4
Table Size (L x W) (In.)	10 x 50
Travel of Knee (In.)	14-1/4
Travel of Ram (In.)	20-1/2
Weight (Lbs.)	2900
Work Table Weight Capacity (Lbs.)	720